


(2 - 48") Low Clearance Split Frame Pipe Cutting & Bevelling

A low clearance split frame pipe cutting and bevelling machine that has been designed for cutting and bevelling pipe efficiently. Can operate on many materials and cuts with inserted tooling.



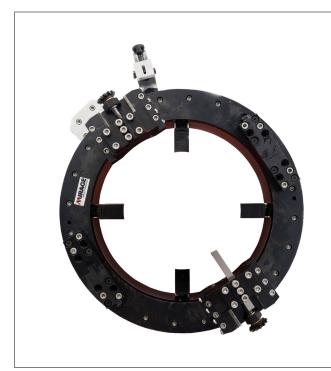

- Efficiently cuts and bevels pipes
- Slim line, adjustable combination cutting tool slides included as standard
- Air or hydraulic motor drive options
- Performs all operations in carbon steel, stainless steel, Hastelloy, Incolloy and Super Duplex


The machine is supplied complete with:


- 1 off split half drive ring, gearbox and drive motor
- 2 off combination tool sides for cutting and bevelling
- Striker feed unit with adjustable cut feature, integral clamping unit and spacers
- Toolkit including air filter lubricator and hose connection (when required)
- Storage / shipping box, CE certificate, packing list and manual



Weights a	nd Dimensio	ons				
Model	Size Range		A	В	С	Weight
MSF2-6	2 - 6"	51mm - 152mm	6.88" (175mm)	7.51" (191mm)	6.0" (152mm)	14 Kg
MSF4-8	4 - 8"	102mm-203mm	8.87" (225mm)	9.21" (234mm)	6.0" (152mm)	20 Kg
MSF6-12	6 - 12"	152 - 254mm	13.00" (330mm)	10.94" (278mm)	6.0" (152mm)	25 Kg
MSF8-14	8 - 14"	203 - 356mm	14.25" (362mm)	11.45" (291mm)	6.0" (152mm)	27 Kg
MSF10-16	10 – 16"	254 - 406mm	16.3" (413mm)	12.8" (326mm)	6.0" (152mm)	35 kg
MSF14-20	14 - 20"	356 - 508mm	20.25" (514mm)	14.70" (373mm)	6.0" (152mm)	42 Kg
MSF18-24	18 - 24"	457 - 610mm	24.25" (616mm)	16.63" (422mm)	7.0" (178mm)	86 Kg
MSF22-28	22 -28"	559 - 711mm	28.5" (724mm)	20.86" (530mm)	7.0" (178mm)	95 kg
MSF26-32	26 - 32"	660 - 813mm	32.50" (826mm)	20.63" (524mm)	7.0" (178mm)	107 Kg
MSF30-36	30 - 36"	762 - 915mm	36.50" (927mm)	22.63" (575mm)	7.0" (178mm)	118 Kg
MSF36-42	36 - 42"	915 - 1067mm	42.50" (1079mm)	25.64" (651mm)	7.0" (178mm)	135 Kg
MSF42-48	42 - 48"	1067 - 1220mm	48.50" (1232mm)	28.64" (727mm)	7.0" (178mm)	150 Kg

Model	Вох Туре	Length		Width		Height		Weight	
		mm	inches	mm	inches	mm	inches	Kg	Lbs
MSF2-6	PLASTIC	725	28	856	33	416	16	58	127
MSF4-8	PLASTIC	725	28	856	33	416	16	59	130
MSF6-12	PLASTIC	725	28	856	33	416	16	68	149
MSF8-14	PLASTIC	725	28	856	33	416	16	70	154
MSF10-16	PLASTIC	725	28	1111	43	521	20	84	185
MSF14-20	PLASTIC	725	28	1111	43	521	20	93	205
MSF18-24	STEEL	800	31	1260	49	875	34	340	749
MSF22-28	STEEL	800	31	1260	49	875	34	363	800
MSF26-32	STEEL	800	31	1260	49	875	34	375	826
MSF30-36	STEEL	800	31	1660	65	1075	42	444	978
MSF36-42	STEEL	800	31	1660	65	1075	42	452	996
MSF42-48	STEEL	800	31	1660	65	1075	42	473	1042







Optional Accessories Part off tooling (HSS and MSF814-12 inserted) Front drive gearbox MSF814-19/19a MSF814-13 Extended tool slides (3.5" Universal counter bore slide stroke) MSF814-21 MSF814-24 Hydraulic drive gearbox and OD Axial feed slide mobile HPU MSF814-25/26 MSF814-22/22a Heavy duty tool slide (Inserted Out of round tracking tool slides tooling) Single angle bevel tooling (HSS **Compound bevel tooling** and inserted) J Prep HSS tooling Recommended spares kit